


#### Microphone connector pinout

Pin number	Function
1	Microphone negative input (COLD)
2	Microphone ground
3	Microphone positive input (HOT)
4	Buzzer positive supply (1,8V)
5	Buzzer ground

Electret microphones should be connected between terminals 2(-) and 3(+)

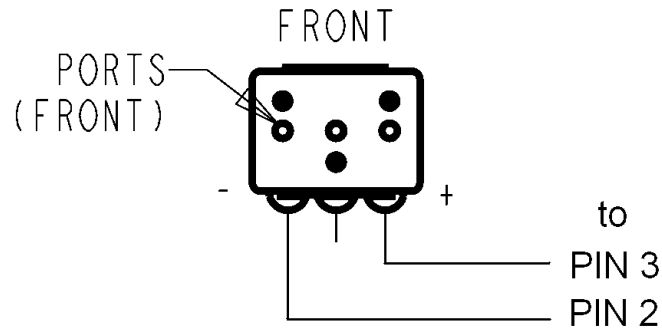

#### 4-20mA sensor connector pinout

Pin number	Function
1	Ground
2	Negative input (100Ohm to ground)
3	Positive input (24VDC)

If the sensor is sinking current, connect it between terminals 2(-) and 3(+). If the sensor is sourcing current (has its own power supply), connect between terminals 1(-) and 2(+).

